HDO installation Toyota Pro Ace - Verso. Model 2022 version 1,2

Bracket kit IN008-8-BRA.





Included in kit:

HDO bracket.

Hatch door bracket.

1 pc relay. (Standard auto-relay)

9 pcs Threaded nuts.

16 pcs M8 X 20mm.

3 pcs M8 X 16mm

Finished installation.



Use bracket as template, see the position from the picture.


Drill holes and install threaded nuts.






D-pillar is covered with fabric/flex carpet (Not included)
Only necessary in Proace "verso"



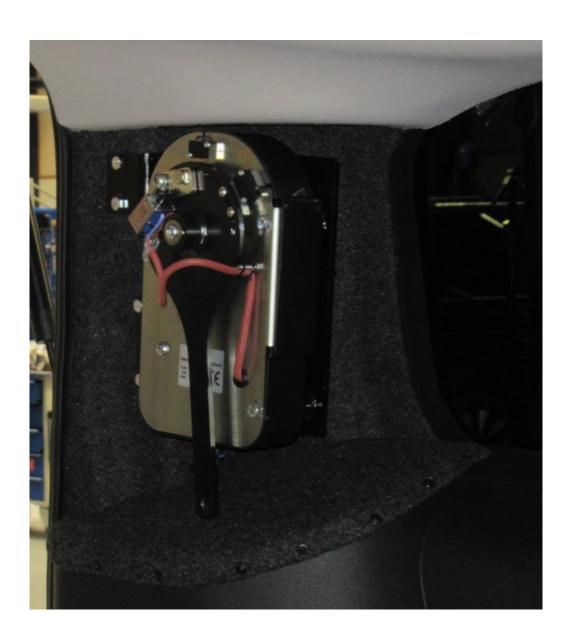


Original plastic cover (D-pillar) is modified + Special cover is made (Not included).





Hatch bracket is installed.


4 pcs Ø8 holes are drilled (Use bracket as drill model)

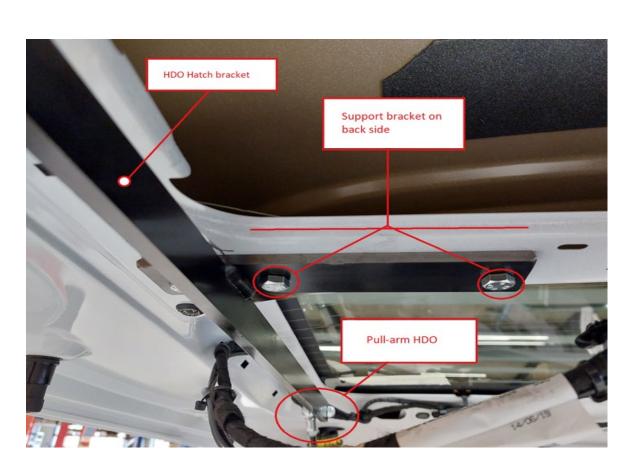

Support bracket





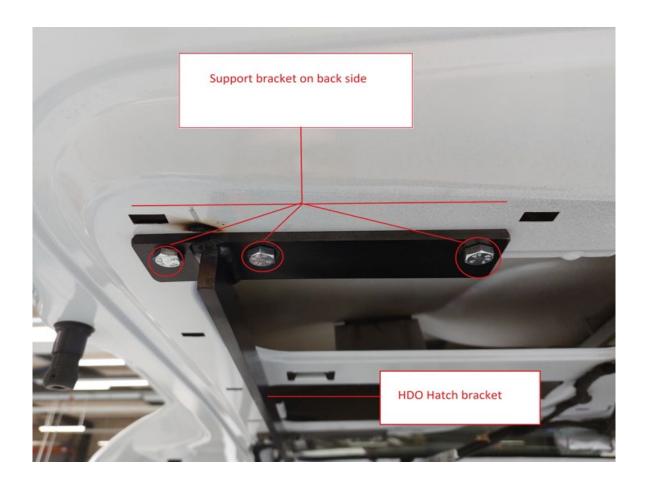









Cover modification hatch and pull arm installation

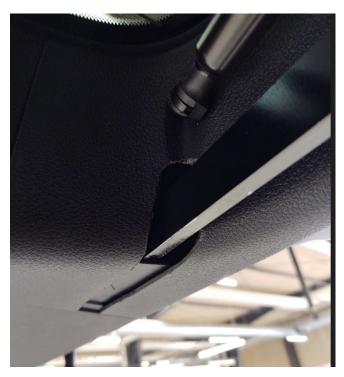






Toyota Pro-ace 2022- wiring diagram

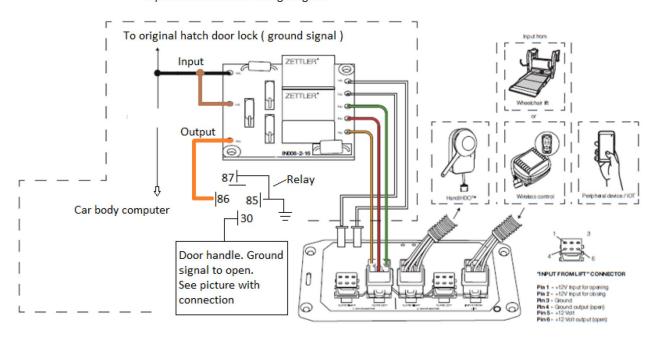

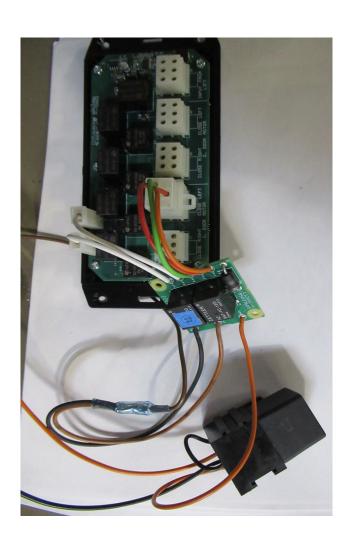

Door handle. Ground signal "input" pin 1 (Door release)






Door lock. Return signal pin 3 = Ground signal/door is open.







"INPUT FROM LIFT" CONNECTOR

Pin 1 - +12V input for opening

Pin 2 - +12V input for obsing

Pin 3 - Ground

Pin 4 - Ground output (open) Pin 5 - +12 Voit

Pin 6 - +12 Volt output (open)