


Seat installation



All you need

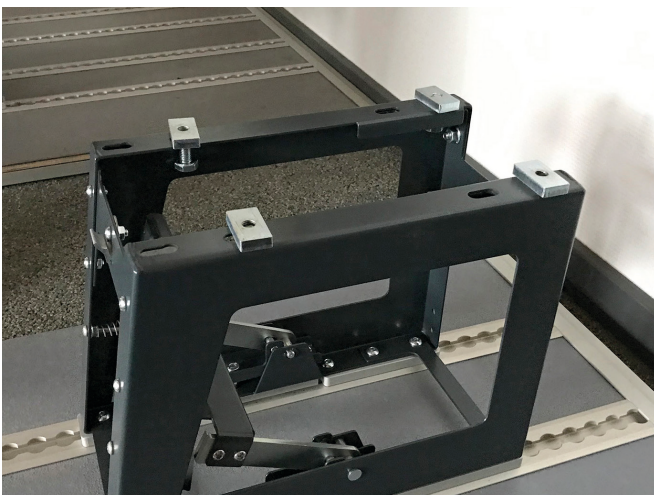

Place the 4 bolts on the leg



Loosen the seat cushion



- in both sides



Remove the cushion



Loosen the plastic cover




- in both sides



Remove the plastic cover




Turn the bolts horizontally

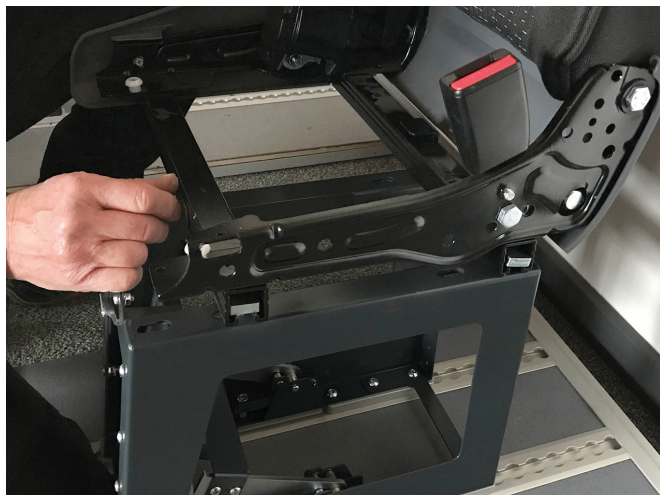

Run the bolts into the rail



Adjust the seat to the side of the bus

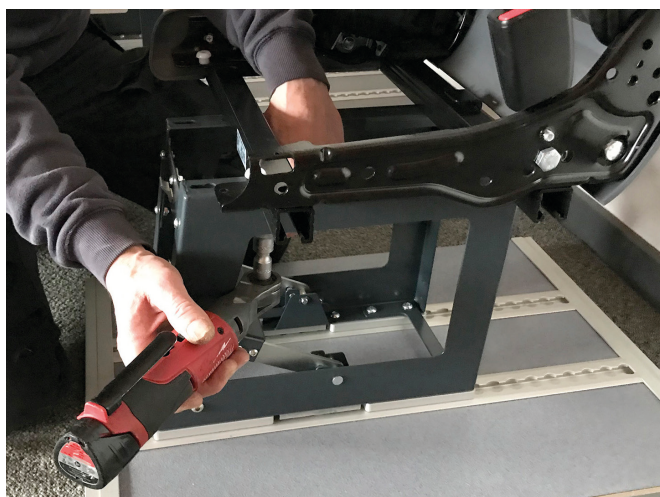

Tighten the bolts



Tighten it with 50 newton



Install the plastic cover



Push the seat cushion on