## **cuto** products

## handihDO<sup>TM</sup> HATCH DOOR OPENER

## HDO MOUNTING


PEUGEOT RIFTER – OPEL COMBO - CITROEN BERLINGO – TOYOTA PROACE CITY Version 1,1



Mount the HDO bracket on the left rear pillar (D Pillar)

Use bracket as template Drill 11mm holes, and mount the supplied Pop Nut. Then screw the bracket in place.





Keep a distance to the marked hole of 50 mm.



Collect the 2 HDO bracket








Mount the bracket to pull the tailgate / Hatch. Use the supplied bracket as reinforce-ment on the Back/inside.

Holes must be drilled for mounting. Use the bracket as a template.

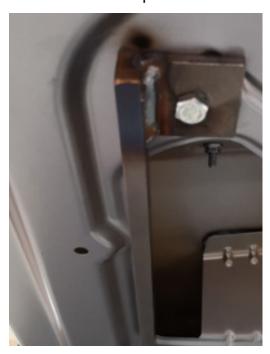












Fit pull arm from HDO. Note position in closed condition. Stop switch (Close) on HDO is adjusted so motor stops pulling about 30 - 40 degrees before fully closed. (Then the gas damper close the tailgate / Hatch.)

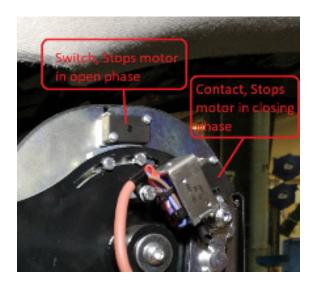


Stop switch (Open) is adjusted so that the motor stops running about 10-20 degrees before the top.



Door handle White IN008-2-16 White Brown Blectric Harch release "Plug 2" 87 Input from Lift or Red-Green-Orange with plug Black Remote. 87a 86 Orange HDO Motor Rectifier White no 14 To Car / ECU Green / Yellow White Door handle. Open signal + 124 Case signal + 124 Opend Ground cultret stor open + 12 Y + 12 Y output their open Door lock / Open signal. Hatch lock Hatch open - Ground White core Ground signal. signal

HDO Peogeot Rifter - Opel Combo - Citroen Berlingo - Toyota Proace city

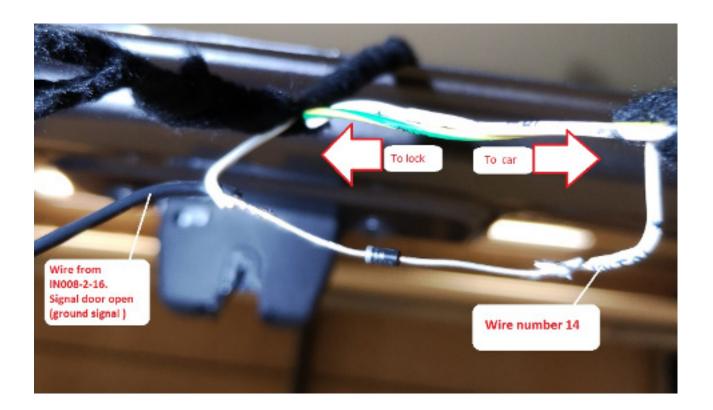





AutoProducts are always ready to assist you, so do not hesitate to get in touch.

AutoProducts ApS Baggeskærvej 48 DK - 7400 Herning Web: autoproducts.eu Phone:+4596289620

Email: sales@autoproducts.dk